# The importance of CO<sub>2</sub> Capture and Storage -a geopolitical discussion

Filip Johnsson
Department of Energy and Environment, Chalmers University of Technology
S-412 96 Göteborg, Sweden
filip.johnsson@chalmers.se +46 31 772 1449

Jan Kjärstad, Mikael Odenberger Department of Energy and Environment, Chalmers University of Technology S-412 96 Göteborg, Sweden

kjan@chalmers.se +46 31 772 1452, mikael.odenberger@chalmers.se +4631 772 1444

#### **ABSTRACT**

The CO<sub>2</sub> capture and storage (CCS) technology is now considered to be one of the key options for climate change mitigation. This paper discusses the implications for the further development of CCS, particularly with respect to climate change policy in an international geopolitics context.

The rationale for developing CCS should be the over-abundance of fossil fuel reserves (and resources) in a climate change context. From a geopolitical point, it can be argued that the most important outcome from the successful commercialisation of CCS will be that fossil fuel-dependent economies will find it easier to comply with stringent greenhouse gas (GHG) reduction targets (i.e. to attach a price to CO<sub>2</sub> emissions). This should be of great importance since, for a geopolitical view, the curbing on GHG emissions cannot be isolated from security of supply and economic competition between regions. Thus, successful application of CCS may moderate geopolitical risks related to regional differences in the possibilities and thereby willingness to comply with large emission cuts. In Europe, application of CCS will enhance security of supply by fuel diversification from continued use of coal, especially domestic lignite. In contrast, failure to implement CCS will require that the global community, including Europe, agrees to almost immediately to start phasing out the use of fossil fuels, an agreement which seems rather unlikely, especially considering the abundant coal reserves in developing economies such as China and India.

## **INTRODUCTION**

Climate modelling projects, such as those reported by the IPCC, suggest that reductions of 50-85% in global emissions of CO<sub>2</sub> (relative to the emission levels in 2000) are required to the year 2050 in order to enable the stabilisation of atmospheric levels of GHGs at 440-490 ppm (~350-400 ppm CO<sub>2</sub>), corresponding to a global temperature increase in equilibrium of 2.0°C to 2.4°C [1] In addition, state-of-the-art research indicates that 50% to 70% reductions in GHG emissions are required to limit the global temperature increase to 2°C; for this target to be met with >66% probability with further reductions required after 2050 and the emission levels should peak not later than 2015 [2]. It is therefore obvious that achieving the 2°C target represents a great challenge from the technical and political points of view. The GHG emission reductions achieved to date have been disappointing, principally due to the abundant resources of fossil fuels, the long turnover times for the capital stock of the energy

infrastructures (e.g., the technical life-time of power plants and the fossil fuel infrastructure is typically 20 to 40 years, *cf.* e.g. OECD/IEA, 2005 [3]), the long lead times for the development and scaling up of low-carbon technologies and the increase in GDP. The global emissions have increased, and continue to do so.

CO<sub>2</sub> capture and storage (CCS) represents a set of technologies which, if successfully implemented, would allow continued use of fossil fuels while reducing GHG emissions. CCS involves the capture of CO<sub>2</sub> from flue gases of large centralised emission sources, such as power plants and other industrial processes. The captured flue gas is then transported to a storage location located deep underground. In addition to reducing carbon emissions, CCS might also enhance the security of supply by allowing the use of domestic fuel resources, such as lignite and coal.

The main reasons why CCS has attracted increasing interest over the last decade are: 1) the large storage capacity for  $CO_2$  that is available at many sites around the world; 2) the unlikelihood that the  $CO_2$  will leak out; and 3) the expectation that CCS technology will be cost-effective, assuming that a price is established for  $CO_2$  emissions.

The aim of the present paper is to discuss the development of CCS in a geopolitical context. The CCS technology is only explained briefly in this paper. For more detailed technical descriptions of the CCS technologies, there are numerous papers published on capture, transport and storage, the CCS special report from the IPCC (2005) [4], and information available from the IEA GHG R&D Programme (<a href="www.ieaghg.org">www.ieaghg.org</a>). The development of CCS is advancing rapidly, so the reader is advised to consult the publications arising from recent conferences within the IEA Greenhouse Gas Program and the International Journal of Greenhouse Gas Control.

## THE CCS CHAIN

The capture and storage of  $CO_2$  (often referred to as 'carbon capture and storage') involves three major steps: 1) the capture of  $CO_2$  from large point sources, such as power plants; 2) the transport of the captured  $CO_2$  to a storage site; and 3) injection of the  $CO_2$  into the storage site, typically a geological formation located deep underground.

Currently, research and development studies of all three steps are underway. However, since the capture process is the most expensive part of CCS, it is generally considered to be the most critical element in efforts to control costs. Compared with a plant without  $CO_2$  capture, the cost for a plant with  $CO_2$  capture, i.e., a CCS system, is higher due to the following factors:

- Higher investment costs
- The energy required for capture, i.e., a CCS plant has lower efficiency than a conventional plant (consumes more fuel to produce the same amount of electricity as a conventional plant)
- Increased maintenance costs
- Costs for transport
- Costs for storage

Typically, these factors will result in roll-out costs (the investment and operating costs expected when technology has reached commercial state) for CCS in the order of  $25 \, \text{€/tCO}_2$  avoided (capture, transport, and storage), although estimates given in literature vary greatly. As mentioned above, such cost is believed to be competitive in a carbon constrained world where there is a price tag on CO<sub>2</sub> emissions.

CCS is expected in the first instance to be cost-effective in large (around 1,000 MW) coal-fired power plants that are running in base-load. In particular, lignite ("brown coal") is a low-cost fuel that in Europe is often burned in high-efficiency power plants with state-of-the-art flue gas cleaning, resulting in low levels of emissions of harmful products, such as nitrogen and sulphur oxides, albeit with high levels of emissions of CO<sub>2</sub>. Typically, such power plants have an electric efficiency of around 43%, although this could be increased to some 48% using available technologies. Future plants may reach electric efficiency levels of around 50%. Considering the typical energy penalty from carbon capture of 7 to 8 percentage points, the first commercial application of CCS plants around 2020 may very well have an electric efficiency similar to that of current coal plants without capture (>40%).

It has also been suggested to capture CO<sub>2</sub> from biomass fuelled processes such as sugar cane-based ethanol mills, chemical pulp mills [5] as well as from power generation [6, 7] and thereby obtaining negative CO<sub>2</sub> emissions ("carbon negatives"). This is often referred to as BECSS (Biomass Energy CCS) and this has been somewhat hyped during recent years. Yet, the concept of BECCS is not straight forward or may even be spurious, depending on context. Firstly, it is likely that capturing CO<sub>2</sub> from biomass fired plants will be more costly than the cost of capturing CO<sub>2</sub> from large coal fired power plants. Second, until CCS has been applied to all fossil fuelled power plants and all other CO<sub>2</sub> emissions have been curbed, global CO<sub>2</sub> emissions are obviously not negative. Thereby, it is not straight forward why to judge BECCS technologies if these are more expensive than CCS from fossil fuel plants. It obviously does not matter which CO<sub>2</sub> emissions are captured and then these should be captured where most cost efficient. Yet, it makes sense that if someone is willing to capture CO<sub>2</sub> from biomass that that party will be acknowledged with negative emissions for the biomass part (e.g. in an emission trading scheme).

Applying BECCS in power generation is not obvious if considering biomass-only fired units, since the economics of CCS assume large scale units and high thermal efficiency. This is due to the bulkiness of biomass (fuel handling logistics and biomass availability) as well as the risk of high temperature corrosion when applying high steam data (a prerequisite for high efficiency). A first, more manageable way to introduce biomass in CCS power plant schemes would be to co-fire biomass with coal (see Robinson et al., 2003 [8], Hansson et al., 2009 [9] for estimates on potentials for co-firing in the U.S. and in the EU). Co-firing would reduce the risk of high temperature corrosion (assuming the biomass fraction does not exceed some 10% of the total fuel input on an energy basis, although what is a "safe" biomass fraction depends on biomass quality and power plant technology).

The main options for transporting the captured  $CO_2$  are pipelines and boat transportation or combinations thereof. Obviously, for a future large-scale  $CO_2$  transportation infrastructure, given the large volumes to be transported, pipeline transportation is the preferred option from both the handling and cost perspectives. Initial projects may use boat transportation, as well as truck transportation, for smaller pilot projects. See [10, 11, 12, 13, 14, 4] for overview of  $CO_2$  transportation issues.

The main target for the storage of CO<sub>2</sub> is deep geological formations, such as saline aquifers and depleted oil and gas reservoirs. Storage is also possible in association with EOR and in deep un-minable coal seams, with coal-bed methane production (ECBMR) offsetting some of the cost of storage. By far the greatest storage potential lies in deep saline aquifers, whereas EOR and possibly ECBMR could be important for the first phase of implementing CCS, in that they would offer less costly storage before an integrated transport and storage network could be put in place. Assessments of national and global storage potentials reveal both onshore and off-shore storage sites (see e.g., [13, 14, 15 and references therein]).

Both in Europe and the US, several of the first CCS demonstration projects have met local opposition from the public and different interest groups ([16, 17], e.g. the so called "Greenville Project" in Ohio). Therefore, there may be a "Catch 22 situation", in that it would probably be easier to get public and political acceptance for off-shore storage, even though such storage will be too expensive for initial projects, certainly for pilot projects, and also for the first large-scale demonstration projects. Yet, there are also on-shore storage projects which have met no or little opposition by the public (e.g. [16], AEP-Mountaineer project in West Virginia and the FutureGen project in Illinois, although recent development indicate some opposition with respect to the latter).

#### CCS AS PART OF A EUROPEAN MITIGATION PORTFOLIO

Clearly, the global community needs all technologies and measures to transform the energy system, so as to meet the reductions in GHGs required over the coming decades. The EC several years ago adopted a target for limiting anthropogenic global climate change to 2°C above pre-industrial levels [18]. To achieve this target, the EC proposed that mitigation levels of 30% reduction in GHG emissions by 2020 and 80% to 95% by 2050 (relative to 1990) should be targeted for developed countries when negotiating international treaties [19]. Considering the different possibilities and levels of willingness to pay for reductions in different sectors, one can expect the electricity generation system to take on more reductions than, for instance, the transportation sector. In addition, electrification of the transportation sector (if such will take place at scale) will in part centralise the emissions from this sector (to the electricity generation system). Therefore, CCS offers a promising mitigation option for the part of the required electricity that is produced from fossil fuels.

5

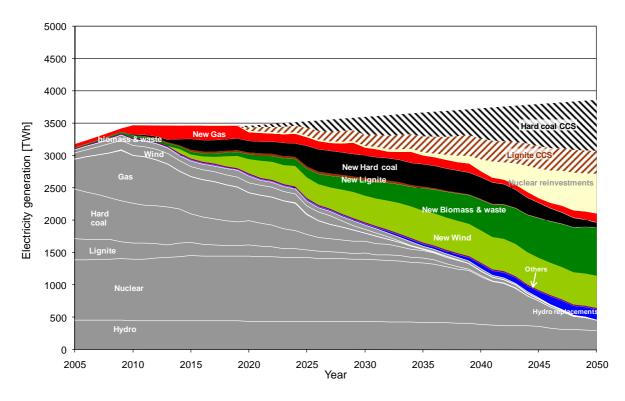


Figure 1. Electricity generation in the EU-27 countries and Norway, from the modelling work described in [21]. In the example, about 15 GtCO<sub>2</sub> is captured between 2020 and 2050. The marginal cost of electricity over the period ranges from 50 €/MWh in 2020 to around 60 €/MWh in 2050. This corresponds to a marginal cost of CO<sub>2</sub> abatement that ranges from 10 €/tCO<sub>2</sub> to 30 €/tCO<sub>2</sub> by 2030, with a steady increase to about 50 €/tCO<sub>2</sub> by 2050. In addition, the prescribed RES targets would require a support scheme of about 25 €/MWh RES-E from 2020, corresponding to a green certificate scheme. "Others" include PV, wave, small-scale hydro, and tidal power.

Figure 1 illustrates a possible development pathway for the European electricity generation system, applying an arbitrarily chosen target of 85% reduction in CO<sub>2</sub> emissions to the year 2050, relative to the level in 1990 (from [20]). Thus, the 85% reduction reflects the large share of the reduction assumed by the electricity generation system. The modelling is regionalized down to each EU Member State (MS), with the total electricity demand to be met for the entire region (EU-27 countries plus Norway) on a common electricity market, with import/export between MS's restricted to limitations in interconnections (current transmission capacity plus investments in new capacity when profitable in the model). Thus, it is assumed that emissions may be traded among the Member States in a manner similar to that used in the EU-ETS. National electricity demand, which is here defined as national electricity end use including distribution losses, for the model start year (2005) is taken from the statistical data (Eurostat, http://epp.eurostat.ec.europa.eu).

The scenario applied in Figure 1 represents a case in which energy efficiency measures proposed by the EU have been successfully implemented and for which there are RES targets, not only up to 2020 but also up to 2050. Thus, the national annual growth rates include an efficiency target of 20% relative to a baseline, which for the electricity sector is assumed to give a 13% reduction by 2020. The baseline corresponds to the national annual growth rates given by the EC [22]. CO<sub>2</sub> constraints to 2020 reflect the higher ambition expressed during

the negotiation of international treaties, i.e., an overall target of reducing GHGs by 30% relative to the 1990 emission levels. According to Capros et al. [23], this implies that the reduction in  $CO_2$  required within the power generation sector should be 40%. Assuming that the efficiency improvement will continue through to 2050 with a total reduction of 35% relative to baseline, this would mean 23% lower electricity consumption than the baseline [20]. RES-E fulfils the EU targets to 2020, and is assumed to grow in the same manner after 2020, assuming 45% RES-E by 2050. There are re-investments in nuclear power in existing plants, but not in Germany and Belgium, for which current (2010) political decisions are assumed to persist. The costs for CCS plants are derived from the ENCAP project [24], an extensive EU project that involved industry as well as academia.

6

The grey field at the bottom of Figure 1 represents the contribution to generation from the present system, which also illustrates the long-lived nature of the capital stock in power generation systems (the model phases out plants when they are no longer profitable to run or when they have reached the assumed technical lifetime). Thus, the diminishing grey field represents the above mentioned need in the EU to replace old plants over the next decades. This requirement for significant investments in power generation is also valid between now and 2020, i.e., before CCS becomes available (and this is also the case for North America). Without successful implementation of energy efficiency measures, there may be a continuous increase in the dependency on natural gas, depending on the penetration of renewable electricity generation [20].

After 2020, when CCS is assumed to become available, it can be seen that lignite and coalfired CCS technologies will become cost-competitive mitigation options (Figure 1). Although gas-fired CCS technologies are included as options, these are not competitive in any MS due to the comparatively lower carbon intensity of natural gas and the fuel price relationship between coal and gas (taken from [22]). From Figure 1, it can be concluded that even if success is achieved in implementing energy efficiency measures, all presently known technologies are required on the large scale, including CCS. As a consequence, there is a strong ramping-up of CCS after 2020, which in reality may be significantly delayed as discussed below since, at present, it seems unlikely that the cost of CCS by 2020 is less than the price of an emission allowance in the EU-ETS. This is partly the result of the banking of emission credits in the previous period of the EU-ETS system, not making it probable that there will be a strong driving force for climate change mitigation before 2020, i.e., there will be no strong driving force for real investments in large-scale demonstration or full-scale CCS projects before 2020. Furthermore, the modelling results assume a co-ordinated infrastructure for CO<sub>2</sub> transport and storage. Although the cost of transport and storage is differentiated in the model, to account for differences in regional conditions, these costs reflect large-scale integrated systems for transport and storage. To establish such systems imposes a significant geopolitical challenge, requiring co-operation between countries and regions. Failure to implement energy efficiency measures or to expand renewable, as in the example shown, obviously will exert even more pressure on CCS with it associated systems, as well as on nuclear power (see [20] for such a scenario).

In Europe and other developed regions, CCS plants will most probably be built at existing power plant sites. It does not seem realistic that it will be politically possible to build new CCS coal plants at entirely new (Greenfield) sites. Even if considering an increase in electricity consumption (as in Figure 1 or with a steeper increase in a case with less success in efficiency measures), there should still be a sufficient number of available sites [25]. In developed economies such as China there are plants built on new sites which therefore also should be the case for CCS plants, depending on when CCS is introduced).

### **CCS DEVELOPMENT**

It is now generally believed that CCS will contribute to large reductions in emissions of CO<sub>2</sub> until year 2050 and beyond (in scenarios the year 2020 is typically taken as the year when CCS is commercially available). Thus, CCS is recognized as an important part of a climate change mitigation portfolio in national and international contexts (e.g. EC, COM(2006)843Final) and in future energy projections [1, 4, 26]. However, CCS has not been applied at scale and the extent to which CCS will contribute to climate change mitigation depends on the successful development of policy measures (such as the EU-ETS) and capture technologies, as well as the ramping-up of a transportation and storage infrastructure for the captured CO<sub>2</sub>. Yet, all the steps in the CCS chain have been demonstrated or applied on a pilot or demonstration scale. The first successful large-scale demonstration of the entire chain of capture, transport, and storage as a climate mitigation project, will have a high symbolic value, and once CCS is successfully implemented, it is likely that it will be much more difficult to secure approval for building coal plants without CCS.

As mentioned above, large-scale commercialisation of CCS is generally expected to take place from year 2020 onwards, i.e., 10 years from now. Consequently, there will be strong pressure during this decade to conduct successful research and to establish demonstration and commercialisation processes, as well as the efficient planning and building up of a CCS transport and storage infrastructure. At present, few researchers in the field believe that CCS will be commercially available by the year 2020; if by 'commercially available' is meant that the cost for CCS is less than the envisioned price of an emission allowance (or other cost to emit CO<sub>2</sub>). This definition is important, since the first large-scale CCS projects will be more expensive than the roll-out cost. Not only is capture expected to be more expensive in the initial large-scale CCS plants, but the transport and storage costs will also be higher. The relatively low costs for transport and storage given in the roll-out costs (each some few € per tonne of CO<sub>2</sub> captured) only hold for a large co-ordinated transport and storage infrastructure. The costs for transport vary considerably with the amount transported and the mode of transportation used [10]. Thus, a transport and storage infrastructure that serves only one plant will have much higher costs, especially if the transported CO<sub>2</sub> has to be transported over long distances, such as to an off-shore storage location [10]. Dooley et al. [27] have shown that the historical growth of the U.S. natural gas pipeline distribution system was at rates that substantially exceeded the growth projections for a future CO<sub>2</sub> pipeline network in the U.S. Thus, the construction of a large-scale CO<sub>2</sub> transportation network is possible from a technical and organizational point of view. However, an important difference is that the natural gas transportation infrastructure was developed to transport a product of high value to the markets, whereas the transportation of CO<sub>2</sub> imposes a cost, which together with the cost for capture and storage must be less than the cost to emit CO<sub>2</sub>. Thus, unless, there is a clear and long term policy measure for emission reduction, resulting in a sufficiently high price on CO<sub>2</sub>, there will be no driving force for establishing a CCS transportation and storage network. It is important to find integrated solutions that encompass different companies and countries. Possibilities and challenges for the establishment of such infrastructure are discussed in (Elementenergy, http://nsbtf.squarespace.com).

Considering the rather long lead times for the development of CCS, it is the opinion of the authors of this paper that the bulk of CO<sub>2</sub> capture will be carried out in newly constructed plants, which will be built in connection with the phasing out of old plants. Also, new plants can be built with a design that maximises the thermal efficiency, which is important in order to get as low electricity generation cost from the plant as possible. Retrofitting will therefore most likely play a minor role in the large-scale deployment of CCS, although it could be

important for the first full-scale demonstrations (but then requires application on high-efficiency thermal plants). In Europe, as well as in North America, there will, as mentioned, be a great need to replace old plants over the next decades. As indicated above, a cost of emitting CO<sub>2</sub> is required in order to get CCS (and other CO<sub>2</sub> mitigation technologies) implemented at scale, and this cost obviously has to be high enough to make it profitable to replace existing non-CCS power plants with CCS plants or with other low-CO<sub>2</sub> or carbonneutral technologies or (energy saving) measures.

8

The European Commission (EC) has acknowledged the challenge and urgency of implementing and scaling up the CCS technology. Thus, the EU provides funding for the implementation of demonstration projects using two mechanisms: 1) within the EU-ETS, 300 million emission allowances will be set aside to fund up to twelve CCS demonstration projects (and to cover demonstration projects on innovative renewable energy technologies); and 2) the so-called European Economic Recovery Programme has allocated approximately €1 billion to contribute to the funding of six CCS demonstration projects (EC, <a href="http://ec.europa.eu/clima/policies/ccs/">http://ec.europa.eu/clima/policies/ccs/</a>). It is important for the EU and North America to take the lead in demonstrating and implementing CCS and to intensify international cooperation on CCS development with developing economies, such as with China (e.g. EU-China Summit <a href="http://eeas.europa.eu/china/summits\_en.htm">http://eeas.europa.eu/china/summits\_en.htm</a> and the U.S.-China Cooperation on Energy and Climate Change, <a href="http://eeas.europa.eu/china/summits\_en.htm">www.pewclimate.org/US-China</a>).

There is a need for a legal framework to regulate CCS. In Europe, there already exists a CCS Directive (Directive 2009/31/EC) for CO<sub>2</sub> storage in geological formations in the EU, which defines requirements for the storage site over its entire lifetime. This directive also contains amendments to other EU directives and regulations that regulate environmental impact assessment, the handling and transport of waste, and environmental liability, so that they include the handling of CO<sub>2</sub>, including its transport. In addition, an amendment (2009/29/EC) to the EU-ETS directive (2003/87/EC) states that CO<sub>2</sub> emissions that are captured, transported, and stored will be considered as not being emitted.

The implementation of new technologies is often faced with the problem of acceptance by the general public. Studies of public attitudes to CCS show that the general public is largely unaware of the CCS technologies. Thus, it is currently difficult to assess the degree of acceptance [28, 29, 30]. As indicated above, several introductory pilot and demonstration projects have met local resistance (although others have not). It seems likely that the inhabitants of regions that are directly dependent upon fossil fuels will feel more positively about CCS than persons who live in regions that are not dependent upon or that are not perceived as being dependent upon these fuels. In regions that have deposits of coal (or lignite), the application of CCS may result in the replacement of an old power plant with a new one, thereby retaining jobs. The storage part will no doubt be controversial in certain cases, although significant storage potential exists offshore, far from inhabited areas. It seems clear that interaction with the local populace from an early stage of each project is important in order to gain confidence regarding the execution of CCS projects, although this is by no means a guarantee that local opposition will be assuaged. For the successful implementation of CCS, it will be important to engage with the communities where CO<sub>2</sub> is to be stored; work aimed at building confidence among public and local authorities on these issues has been initiated during the last years (see WRI<sup>55</sup> for a description of such efforts and programs). It should be mentioned that deployment of new technologies often meet resistance from the public, i.e. not only for CCS (e.g. wind power has met considerable public resistance in several regions).

## DISCUSSION - GEOPOLITICAL RATIONALE FOR CCS

Although, it is obvious that the large reserves and resources of fossil fuels represent the major threat to the climate [31], this fact seems to sometimes be forgotten in the public debate on GHG mitigation strategies, which often focus on choosing or ranking the technologies and measures available for curbing emissions. Considering the drastic cuts in emissions required over the next decades and the competitiveness between economies, the security of supply, and differences in local conditions, the decision is not which option to choose but rather that all the options are needed as is illustrated from the modelling results shown in Figure 1. Clear and strong policies are crucial to the large-scale deployment of technologies and measures (e.g., [33]). The probability that the political system will introduce strong policies, such as a tax on GHG/CO<sub>2</sub> emissions or a trading scheme for which the levels of the allowances are reduced to comply with required reductions, depends on the technologies that are available and the associated cost. There is a window within which political decisions can be taken. Given the strong dependence upon fossil fuels, most notably coal, the availability of CCS technologies that allow for continued use of these fuels while curbing emissions should facilitate the transition towards a more sustainable energy future while maintaining economic competitiveness and security of supply in regions with fossil fuel resources. The societal cost for curbing emissions cannot differ too much between different economies in order to maintain regional competitiveness. Or, the other way, it seems likely that only if the cost and conditions for curbing GHG emissions is similar in different regions there will be any chance to achieve binding targets which can meet the reductions required to meet a 2°C target. Thus, since there obviously are many fossil fuel dependent economies and since fossil fuels are abundant (especially coal), it is important that there are options which allow for continued use of fossil at the same time as emissions can be cut drastically, at least in the medium term before the cost for using fossil fuels exceeds that of other energy. In summary, it is rather obvious that there cannot be large differences in energy policies between regions, cf. [32]. The global economy together with the international markets of fossil fuels and security of supply issues makes it hardly likely that one region will apply CCS and others will not. Thus, although EU and North America may take the lead in developing and demonstrating CCS it seems unrealistic that CCS will only be applied at scale in these regions (or only in EU) while coal is continued to be used without CCS in developing economies. Consequently, for a global large scale diffusion of CCS there must be a price on CO<sub>2</sub> emissions in all regions. This is of course a challenging task from a geopolitical point of view, considering the slow development of binding targets within the UN driven climate change negotiations. A geopolitical question can thus be if successful demonstration of CCS may enhance the chances of getting a widespread price on CO<sub>2</sub> emissions, although not necessarily within the same regime for the entire globe. The first successful large-scale demonstration of the chain of capture, transport, and storage will have a high symbolic value, and once CCS is successfully implemented, it probably becomes much more difficult to secure approval for building coal plants without CCS even in regions where CCS was not demonstrated. In other words, it may very well be that a success of CCS in one region will make it politically impossible to build plants without CCS also in other regions. Thus, provided successful large scale demonstration of CCS (in for instance EU), the probability of successful global diffusion of this technology (followed by regional emission policies making it impossible to build coal plants without CCS) may be higher than the success of first reaching a global agreement on emission reductions.

It is important that there is a strong political consensus behind the necessity of pushing CCS forward. EU should be able to play a key role in this respect and, developing CCS should be seen as a an opportunity since a success of CCS in Europe will most likely make other

economies to follow, at the same time as this will make European technology providers to get a competitive advantage in a global market. Presently, the political momentum in the CCS development seems rather weak with the development rather governed by local opinions than from a strong climate policy (which is lacking). Indeed, there are the demonstration projects but they have not reached that far and are – in spite of receiving funding from the European recovery funds - still pending on additional support. Thus, without a predictable and high enough cost to emit CO<sub>2</sub> imposed by the EU-ETS system, the European development of CCS (as well as other carbon mitigation technologies) will depend on technology specific support. For CCS, such support is likely to be more controversial than for renewable technologies. However, as mentioned above, before CCS has been demonstrated at large scale, it seems unlikely that there will be a cost to emit CO<sub>2</sub> in fossil fuel dependent regions. Hence, a hypothesis from the discussions in this paper is that EU cannot count on that other fossil fuel dependent economies will impose a cost high enough for CCS to be developed, but EU has to rely that a success of CCS in EU from a price on CO<sub>2</sub> emissions will diffuse to other regions.

In summary, the following points with geopolitical implications can be made with respect to the future development of CCS:

- In various scenarios and projections of the future development of the energy system, at both the regional and global levels, CCS is generally assumed to account for a significant share of CO<sub>2</sub> reductions in the stationary energy system (mainly electricity generation) from 2020-2025 and beyond.
- In these future developments, the roll-out costs for CCS are typically estimated to be in the order of 25 €/tCO<sub>2</sub> avoided (capture, transport, and storage), i.e., less than the costs expected to be associated with emitting CO<sub>2</sub> (e.g., as in the European Emission Trading Scheme, EU-ETS).
- The potential for CO<sub>2</sub> storage is large, which is one of the major (and essential) motivations for the great interest in CCS.
- The first successful large-scale demonstration of the chain of capture, transport, and storage will have a high symbolic value, and once CCS is successfully implemented, it is likely that it will be much more difficult to secure approval for building coal plants without CCS.
- Perhaps the most important outcome of the successful commercialisation of CCS will be that it will become easier to get fossil fuel-dependent economies to comply with stringent GHG reduction targets. Failure to implement CCS will mean that the global community will have to agree more or less immediately on starting to phase out the use of fossil fuels, an agreement on which seems more unlikely than reaching a global agreement on stringent GHG reductions.

There are, however, a number of uncertainties regarding the near-future prospects for CCS, and several challenges must be overcome to ensure the successful commercialisation of CCS by 2020. Although CCS may help reaching a global agreement on climate change mitigation, clear and long-term policy measures are required for ensuring that CCS is developed, demonstrated, and commercialised over the next decade. Here, the EU and North America should be able to take a leading role (which is to some extent already the case, but as indicated above the work with developing CCS needs to be intensified).

It can be concluded that at present it seems *unlikely* that *CCS will significantly contribute to climate change mitigation before 2025*. If a significant CCS contribution is to take place already in 2025, activities to develop CCS globally and to find integrated ways to build up a transport and storage infrastructure are required from now (2010) onwards. An obvious condition is the successful large-scale demonstration of CCS within the next five years. The following conclusions can be drawn in this context:

- Failure to implement CCS will be a tremendous challenge from a geopolitical view, if the global community at the same time will try to comply with climate mitigation such as wanting to limit global temperature increase to 2°C. Such a scenario will require that the global community, including Europe, agrees to almost immediately to start phasing out the use of fossil fuels, an agreement which seems rather unlikely, especially considering the abundant coal reserves in developing economies such as China and India.
- Key issues in achieving the commercialisation of CCS are that an integrated transportation and storage infrastructure is established in a timely manner (planning must be commenced within a few years) and that market regimes are identified (e.g., public-private partnerships). This is a geopolitical challenge with respect to cooperation between regions which will benefit from such an infrastructure to a different degrees.
- Most of the available storage estimates rely on rather rough estimates, which mean that site-specific investigations are required in order to arrive at the actual storage capacity. Ways and policies to stimulate site-specific investigations of storage capacities must be found. This will require international co-operation if to be successful.
- Although the above-mentioned estimates of roll-out costs appear to be attractive, the
  costs incurred during the first years after commercialisation may be significantly
  higher. Thus, it is important to find CCS support schemes and concerted actions for
  building up the CCS infrastructure, so as to minimise the time before the roll-out costs
  are reached.
- It is of the utmost importance to ensure that the planned large-scale demonstration projects are successfully implemented. For the EU, it is important that the six projects that have recently received economic support from the EU recovery funds will be successfully carried through, so that the experiences gained can be used efficiently in subsequent projects.
- Regarding the above point, the banking of credits within the EU-ETS system is problematic, making it likely that the cost for emitting CO₂ will not exceed 20€/tCO₂ before 2020. This means that there will be a lack of a strong driving force for building large-scale demonstration plants and the first "near-commercial" CCS plants.
- An alternative "Plan B" should be developed in case CCS introduction is delayed or the CCS technology fails. An obvious geopolitical challenge in this case is how the international community should handle the large resources of fossil fuels (which could not be used to the same extent as compared to the situation in which CCS became

available on a large scale or in the case of CCS failure, had to be phased out completely over a few decades).

• For the EU, investments made during the period until CCS is available may increase the dependence on natural gas for electricity generation. For Europe, this is obviously negative from a security of supply point of view although exploiting of unconventional gas in North America and (perhaps) in Europe, may moderate these negative effects.

In summary, successful commercialisation of CCS is crucial to mitigate climate change, especially considering the likelihood of countries and regions that are heavily dependent on fossil fuels (especially coal) reaching agreement on strict CO<sub>2</sub> emission reductions. Thus, with respects to geopolitics CCS may moderate tensions between fossil fuel dependent and nonfossil regions with respect to how to meet strong targets on CO<sub>2</sub> reductions. The main challenge for CCS is reaching the estimated roll-out costs around or shortly after 2020. Clear and long-term climate change mitigation policies are important in terms of sending clear signals to the market that investments in developing CCS will be rewarded in the long run.

#### **ACKNOWLEDGEMENTS**

The research on which the current work is based is funded by the project "Pathways to Sustainable European Energy Systems" and by the PLANETS project of the EU 7<sup>th</sup> Framework Program.

#### **LITERATURE**

- 1. IPCC, 2007, Intergovernmental Panel on Climate Change, Climate Change 2007: Mitigation. Contribution of Working Group III to the Fourth Assessment Report of the Intergovernmental Panel on Climate. IPCC, Cambridge.
- 2. Fee E, Johansson D. J. A., Lowe, J., Marbaix, P., Matthews, B. Meinshausen, M. (2010) Scientific Perspectives after Copenhagen Information Reference Document, Brussels, Belgium: European Union.
- 3. OECD/IEA, 2005, "Projected costs of generating electricity", IEA, Paris. ISBN: 92-64-00826-8.
- 4. IPCC, 2005, "IPCC Special Report on Carbon Dioxide Capture and Storage", Metz, B., Davidson, O., de Coninck, H., Loos, M., Meyer, L. (Eds.) Cambridge University Press, UK. (available at
- www.ipcc.ch/publications\_and\_data/publications\_and\_data\_reports.shtml).
- 5. Möllersten, K., Yan, J., Moreira, J.R., "Potential market niches for biomass energy with  $CO_2$  capture and storage—Opportunities for energy supply with negative  $CO_2$  emissions", *Biomass Bioenergy* 25, 2003, pp273 285.
- 6. Rhodes, J.S., Keith, D.W., "Engineering economic analysis of biomass IGCC with carbon capture and storage", Biomass and Bioenergy, *Biomass Bioenergy* 29, 2005, pp440 450.
- 7. Luckow, P., Wise, M.A., Dooley, J.J., Kim, S.H., "Large-scale utilization of biomass energy and carbon dioxide capture and storage in the transport and electricity sectors under stringent CO<sub>2</sub> concentration limit scenarios", *Int. J. Greenhouse Gas Control* 4, 2010, pp 865-877.
- 8. Robinson, A.L., Rhodes, J.S., Keith, D.W., "Assessment of Potential Carbon Dioxide Reductions Due to Biomass-Coal Cofiring in the United States", *Environ. Sci. Technol.* 37, 2003, pp5081–5089.

- 9. Hansson, J., Berndes, G., Johnsson, F., Kjärstad, J., "Co-firing biomass with coal for electricity generation An assessment of the potential in EU27", *Energy Policy 37*, 2009, pp1444-1455.
- 10. Svensson, R., Odenberger, M., Johnsson, F., and Strömberg, L. (2004). "Transportation systems for  $CO_2$  Application to carbon capture and storage." *Energy Convers. Manage.*, 45(15-16), 2343-2353.
- 11. McCoy, S., Rubin, E.S., "An engineering economic model of pipeline transport of CO<sub>2</sub> with application carbon capture and storage", *Int. J. Greenhouse Gas Control* 2, 2008, pp219-229.
- 12. van den Broek, M., Brederode, E., Ramírez, A., Kramers, L., van der Kuip, M., Wildenborg, T., Turkenburg, W., Faaij, A., "Designing a cost-effective CO<sub>2</sub> storage infrastructure using a GIS based linear optimization energy model", *Environmental Modelling & Software* 25, 2010, pp1754-1768.
- 13. IEA, 2005, "Building cost curves for CO<sub>2</sub> storage: European sector", Report 2005/2, February 2005.
- 14. IEA, 2005, "Building cost curves for CO<sub>2</sub> storage: North America", Report 2005/3, February 2005.
- 15. Kjärstad, J., Johnsson, F., "Ramp-up of large-scale CCS infrastructure in Europe", *Energy Procedia 1*, 2009, pp4201-4208.
- 16. Dütschke, E., "What drives local public acceptance comparing two cases from Germany", *Energy Procedia*, in press 2010 (in Greenhouse Gas Control Technol., Proc. Int. Conf. 10<sup>th</sup>).
- 17. Wassermann, S., Schulz, M., Scheer, D., "Linking Public Acceptance with Expert Knowledge on CO<sub>2</sub> Storage: Outcomes of a Delphi Approach", *Energy Procedia*, in press 2010 (in Greenhouse Gas Control Technol., Proc. Int. Conf. 10<sup>th</sup>).
- 18. European Commission, 2007, "Limiting Global Climate Change to 2° Celsius the Way Ahead for 2020 and beyond", COM(2007)2 final.
- 19. European Commission, 2009, "Towards a comprehensive climate change agreement in Copenhagen", COM(2009) 39 final
- 20. Odenberger, M., Johnsson, F., "CCS in the European Electricity Supply System assessment of national conditions to meet common EU targets", *Energy Procedia*, in press 2010 (in Greenhouse Gas Control Technol., Proc. Int. Conf., 10<sup>th</sup>).
- 21. Odenberger, M., Johnsson, F., "Pathways for the European electricity supply system to 2050—The role of CCS to meet stringent CO<sub>2</sub> reduction targets" *Int. J. Greenhouse Gas Control* 4, 2010, pp327-340.
- 22. EC, 2007, European Commission, "European Energy and Transport Trends to 2030", 2007 update.
- 23. Capros, P., L. Mantzos, V. Papandreou, N. Tasios (2008) Model-based Analysis of the 2008 EU Policy Package on Climate Change and Renewables, Primes Model E3MLab/NTUA, Report to the European Commission DG ENV.
  - 24. ENCAP (2006) Power systems Evaluation and Benchmarking. Report.
- 25. Odenberger, M., Johnsson, F.," Pathways for the North European electricity supply", *Energy Policy 37*, 2009, pp1660–1677.
- 26. IEA, 2008, "Energy Technology Perspectives Scenarios and Strategies to 2050", The International Energy Agency.
- 27. Dooley, J. Dahowski, R.T., Davidson, C.L., "Comparing Existing Pipeline Networks with the Potential Scale of Future U.S. CO<sub>2</sub> Pipeline Networks", *Energy Procedia 1*, 2009, pp1595-1602.
- 28. Reiner, D.M., Curry, T.E., de Figueiredo, M.A., Herzog, H.J., Ansolabehere, S.D., Itaoka, K., Johnsson, F., Odenberger, M., "American exceptionalism? Similarities and

- differences in national attitudes towards energy policy and global warming" *Environ. Sci. Technol.* 40, 2006, pp2093–2098.
- 29. de Best-Waldhober, M., Daamena, D., "Development of CCS awareness and knowledge of the general public between 2004 and 2008", *Energy Procedia*, in press 2010 (in Greenhouse Gas Control Technol., Proc. Int. Conf., 10<sup>th</sup>).
- 30. Ashworth, P, Boughen, N., Mayhew, M., Millar, F., "From research to action: Now we have to move on CCS communication", *Int. J. Greenhouse Gas Control* 4, 2010, pp 426-433.
- 31. Kjärstad, J., Johnsson, F., Fossil Fuels: Climate Change and Security of Supply, The Dubrovnik Conference on Sustainable Development of Energy, Water and Environment Systems, 2011.
- 32. Correlje, A., van der Linde, "Energy supply and geopolitics: A European perspective", Energy Policy 34, 2006, pp532-543.
- 33. Dadhich, P., Dooley, J., Fujii, Y., Hohmeyer, O., Riahi, K., 2005. Cost and economic potential. In IPCC 2005.